

# Blinder III IP



# Outdoor LED Blinder


- 147W 2800K bi-color COB LED(WW/Amber)
- Advanced optical system delivers a super high output of 10600lm
- CRI $\geq$ 90
- Fan-free design and quiet operation suitable for studio use
- Selectable PWM frequency for flicker-free video with any camera
- 4 dimming curves with 16-bit control for smooth dimming
- Consistent color temperature throughout the dimming curve
- Built-in macros make for easy programming of stunning effects
- Rugged touring-grade design with optional 1\*4 or 2\*2 master brackets (sold separately) to achieve versatile mounting options



Use optional interlock brackets to achieve the below riggings



Beam Angle 58.8°

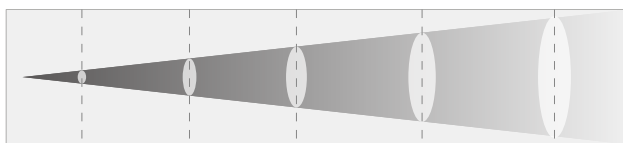

Distance(m)	1	3	5	7	10
Lux(lx)	11790	1310	471.6	240.6	117.9
Diameter(cm)	113	338	562	788	1126

## PHOTOMETRICS

Light Source	WW: 1.33W * 96PCS A: 1.93W * 10PCS
Color Temperature	2757K
Luminous Flux	10556LM
CRI	92.4
Beam Angle	58.8°
Field Angle	98.1°
LED Life	90,000 hours

## KEY FEATURES

Tilt	360°
Strobe	1 ~ 30Hz, electronic
Dimmer	0~100%

## I/O

Mains	100 ~ 240VAC, 50 ~ 60Hz
Power	142.3W/120V, 140.3W/230V
Power Connections	IP65 Power IN+OUT
DATA Connections	IP65 DMX In+Out
Max. Power Linking	8pcs@120V 15pcs@230V

## CONTROL

Protocol	DMX 512, RDM
DMX Channel	1CH/2CH/3CH/4CH/5CH/8CH
On-board Menu	Yes
Display	LCD Screen

## PHYSICAL

Housing	Magnesium alloy
IP Rated	IP65
Ambient Temperature	-10°C ~ +45°C
Cooling	Passive
Dimension	432.4*100.1*229.8mm
Weight	7.5kg

