




COMPACT OUTDOOR LED MOVING PROFILE WITH CMY

- 1000W 7300K LED engine
- IP66-rated tour-grade construction
- Compact body, light weight and quiet operation
- Super high output of 34k lumen
- Wide zoom range from 5°~50°
- Linear CMY + color wheel/split colors
- White color temperature presets from 2500K- 6000K
- Extremely even spot with flawless field consistency
- Flawless 16-bit dimmer with SPWM control
- Smooth 540°/270°pan/tilt movement
- DMX RDM control

Color

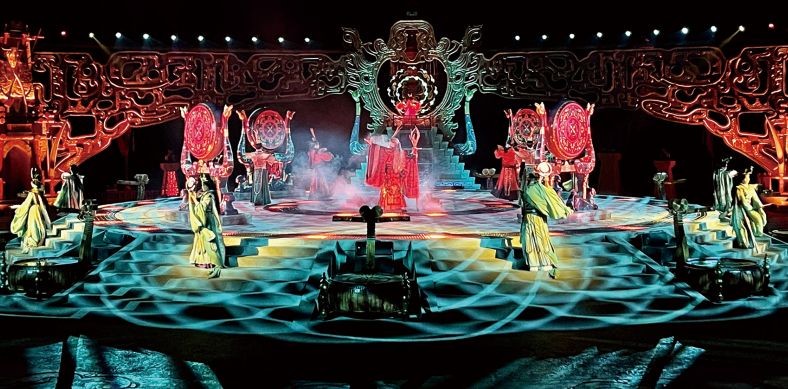

Roatating Gobo




Fixed Gobo




Framing Shutter Animation



Beam Angle 5°

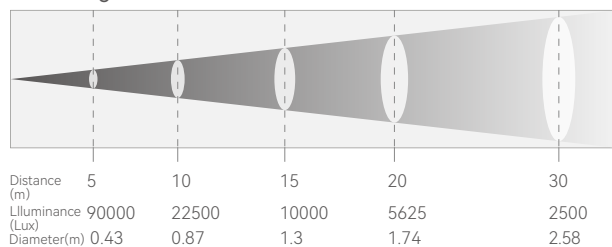

Beam Angle 50°

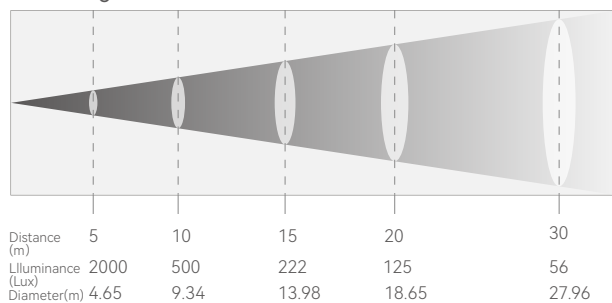

PHOTOMETRICS

Light Source	1000W 7300K LED engine
Fixture Output	34000lm (HP)
Color Temperature	2500K- 6000K
CRI	CRI≥96,R9:93(HR)
TM-30-15-rg/rf	95/69
TLCI	45
LED Life	30000hrs
Beam Angle	5°~50°

KEY FEATURES

Pan	540°
Tilt	270°
Color System	CW + CMY + CTO + 6 color filters + open
Roatating Gobo	1 rotating gobo wheel (7 + open)
Fixed Gobo	1 fixed gobo wheel (8 + open)
Animation	1 animation wheel with variable speed
Framing System	4 independent blades with +/- 35° rangeand +/-60°system rotation
Iris	Motorized iris with 15 leaves, 15~100% linear adjustment
Frost	1° linear soft edge frost with 0~100% adjustment
Strobe	1~30Hz
Dimming	4 dimming modes
Prism	Bi-directional 4-facet prism with variable speed

CONTROL

Protocol	DMX / RDM
Data connections	XLR DMX In/Out, linking up to 32pcs
DMX Channel	39CH/41CH
Display	2.83inches TFT display

POWER

Mains	100 – 240 VAC, 50/60 Hz
Power connections	PowerCON True One In
Consumption	1295W/230V
Power Factor	0.96/230V

PHYSICAL

Cooling	Low noise waterproof fan with heat pipe
Dimension	390 x 330 x 762 mm
Weight	38.5kg
IP Rating	IP66
Ambient	-10℃~45℃
Housing	Magnesium alloy, matte black finish

