

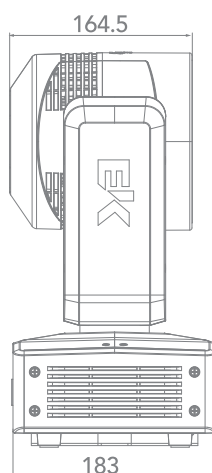



M230W

- 4° ~57° linear zoom
- Compact, lightweight, fast
- Two pan/tilt speed modes (normal & turbo)
- Onboard user preset library (save/load)
- Built-in color and strobe macros
- RGB Gamma adjustment
- White color temp presets from 2500 ~ 8000K
- Flawless 16-bit 540° /270° motorized pan/tilt movement
- Selectable PWM frequency for flicker-free video with any camera
- DMX, RDM control

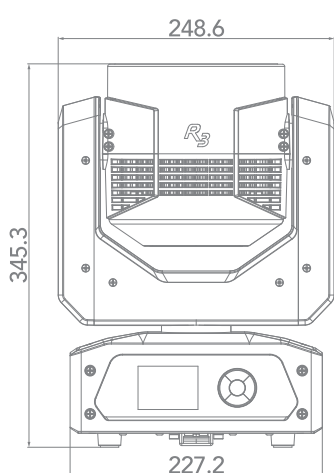

Light Source:	280W RGBW LED
Output:	4600lm
Color Temperature:	2500K-8000K
CRI:	CRI>90
Lifespan:	20K hrs
Beam Angle:	4° ~57°
Pan Movement:	540° (16bit)
Tilt Movement:	270° (16bit)
Color:	RGBW
Zoom:	4° ~34°
Focus:	0~100% Motorized focus
Strobe:	0~30Hz

Dimming:	0~100%
Protocol:	DMX 512 / RDM
DMX Channels:	16/20
Onboard Menu:	2.83 inches TFT display
Power Connections:	PowerCon In/Out, linking up to 8units @ 230V
Data Connections:	3-pin XLR In/Out for DMX, Up to 25 units
Consumption:	308W/230V , 311W/120V
Power Factor:	0.98/230V , 0.99/120V
Ambient:	-10℃~45℃
Cooling:	noiseless fan
Size:	249 x 183 x 345 mm
Weight:	6.6 kg

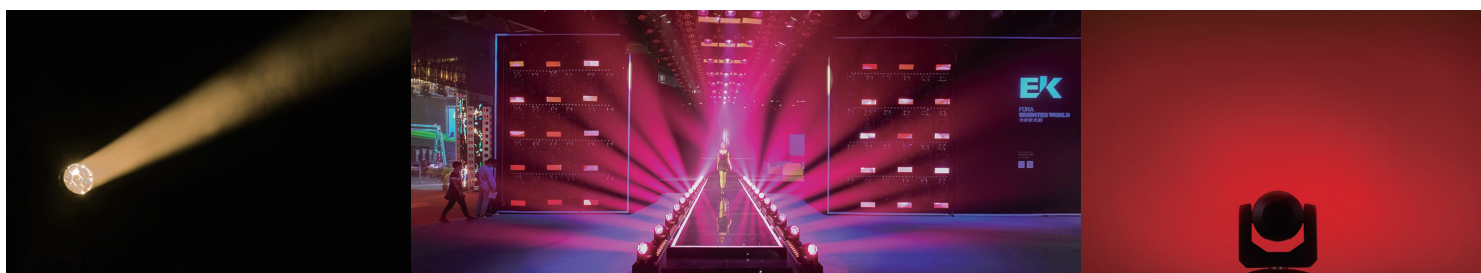


R_3

Color



Beam Angle: 4°~60°

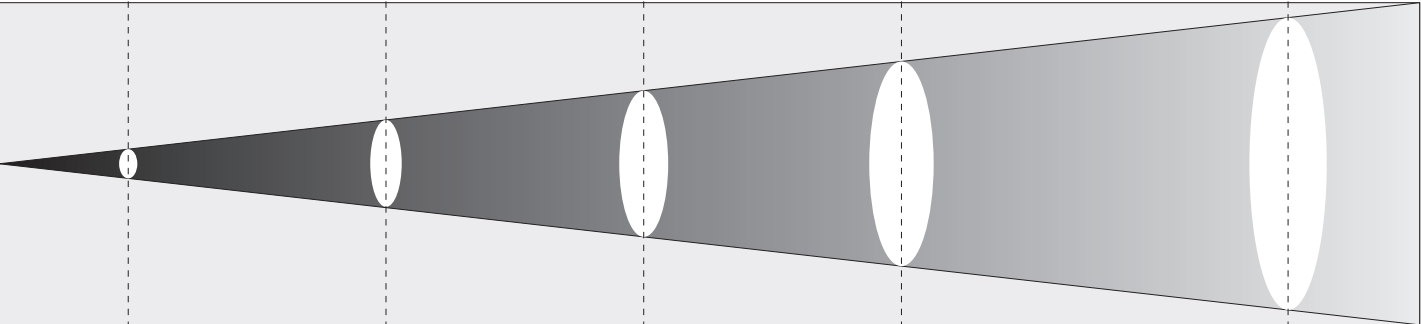

Distance (m)	1	3	5	7	10
At 4° (lux)	453600	50400	18144	9257	4536
At 60° (lux)	10980	1220	439	224	109