


# Radiant 3000



# IP66 Pixel-mappable LED Strobe


- 3600W RGBWW LED
- Up to 210000lumens output
- Linear CCT: 2800K ~ 10000K
- Prominent color rendering, CRI > 93, R9 > 90
- 60 individually controllable segments for dynamic effects and visuals
- Stunning selection of pre-programmed macros and special effects
- Two-layer foreground and background colors and effects
- 16-bit dimming guarantees smooth fades and flick-free output
- Continuous operation possible due to superpotent thermal design
- Rugged IP66 tour-graded construction for all-round protection for fixtures in any application
- NFC+Bluetooth+App integration enables seamless one-touch connection between palm-devices and fixtures for fixture setup software upgrade, real-time error monitoring, and remote maintenance support
- Two magnetic diffusor for options, black diffusor allows for perfectblend with environment, or use milky diffusor to easily switch to a led softpanel
- Optional floor stand for sit-flat floor mounting

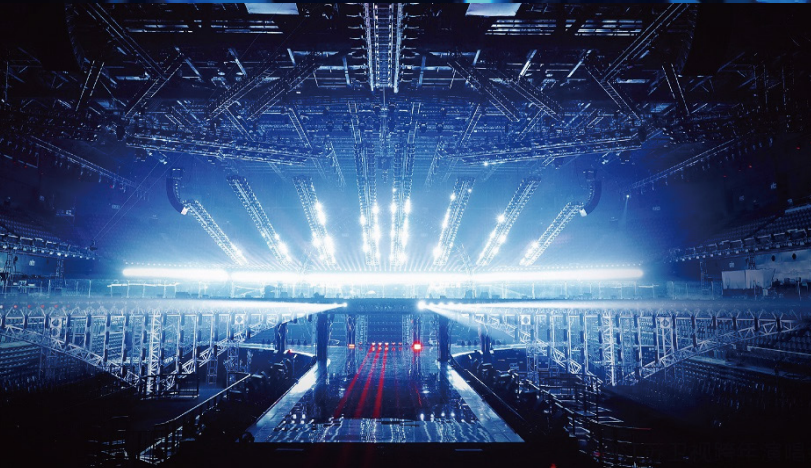

## Color System



## Beam Angle 112°

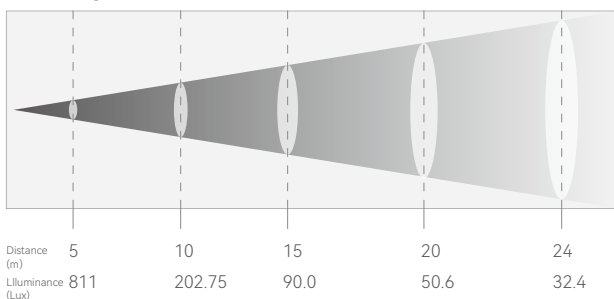

## PHOTOMETRICS

Light Source	3600W RGBW LED
Output	210000lm (Peak Value)
Color Temperature	2800-10000K
CRI	≥90
Beam Angle	112°
Field Angle	158°
LEDLife	30000H

## FEATURES

Color System	RGBW
Pixel Matrix	5X12
Strobe	1~30Hz
Dimming	0 ~ 100% linear dimming

## CONTROL

Protocol	DMX512/RDM/SACN/Artnet
DMX Channel	4 Basic CH+12 pixels CH+4 Advanced CH
Data Connections	Sitron waterproof XLR 3P power In/Out,Sitron waterproof Artnet power In/Out
Maximum Data Connections	Linking up to 32pcs
Display	240RGB*320 2.8-inch TFT display

## POWER

Mains	100 ~ 240 VAC,50 Hz
Power connections	Sitron waterproof power In/Out
Maximum Power Connections	2PCS @230V
Consumption	Static:230V@985W;Strobe Peak:230V@ 3400W
Ambient	-15°C~45°C

## PHYSICAL

Size	440*180.2*218.5mm
Weight	9.4Kg
IP rating	IP66
Cooling	Aluminum alloy heat sink with low noise fan
Housing	Magnesium alloy, matte black finish

