

EC60




Variable Zoom LED


Beam Wash Moving Head Light

61*50W RGBWW LED light source
 Up to 51000lumen output
 Color temperature 2500K ~ 8000K
 3.8° ~52° variable zoom range
 CRI>90
 RGBWW rich and saturated color mixing
 Independent channel to calibrate color temperature
 Flawless 16bit dimming
 Flicker-free output suitable for any camera/videos
 Pan Tilt speed mode optional:Normal /Fast
 Weather-resistant IP66 tour-grade construction
 DMX512/RDM/sACN/Artnet/Bluetooth/APP/NFC

Color Mixing

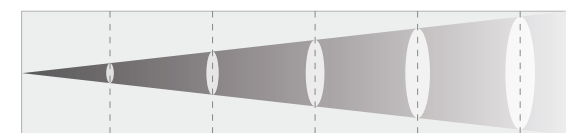

Distance (m)	10	15	20	25	30
Illuminance (lux)	58600	26044	14650	9376	6511

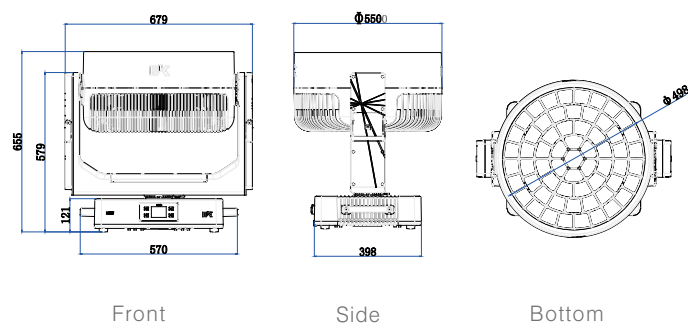

PHOTOMETRICS

Light Source	61*50W RGBWW LED
Color Temperature	2500K-8000K
Lumen Output	>51000LM
CRI	>90
LED life	50000H

KEY FEATURES

PAN	540°
TILT	270°
Color System	RGBWW
Zoom	Beam angle 3.8-35°, pan beam angle 5.4°-52°
Strobe	1-30HZ
Dimmer	0-100% linear dimming

CONTROL

Protocol	DMX512/RDM/sACN/Artnet/Bluetooth/APP/NFC
DMX Channel	16CH/34CH/31CH
Data Connections	DMX In/Out
Display	2.8 inch TFT display
Frequency	600Hz/1.2KHz/2KHz/4KHz/6KHz/25KHz
Built-in programs	Yes
Pixel Control	Single+integrated pixel control

POWER

Mains	100-240V,50/60Hz
Consumption	230V@3200W
Power connections	Direct Power In/Out
Data connections	DMX In/Out
Max power linking qty	Only 1PC
Max data linking qty	Linking up to 32PCS
Power Factor	230V@0.95
Ambient	-20~50℃

PHYSICAL

Size	570*679*655mm
Weight	51.5Kg
IP rating	IP66
Cooling	Heat sink with noiseless fan
Housing	die-cast magnesium

ACCESSORY

Standard	power cable, data cable, omega bracket
----------	--