

epar VW
INFINITI




Variable White COB LED PAR

- 150W RGBW LED par
- Variable white color temperature selection from 2800K ~ 6500K
- Ultra-linear dimming technology with 4 selectable dimming curves
- Detachable lenses for choice of medium or wide beam angles
- RGBW Chip On Board LED array produces brilliant colors and perfect whites
- Quiet operation suitable for studio use
- Flicker-free output with selectable PWM frequencies for worry-free video
- Double mounting bracket allows fixture to be flown or floor-mounted
- DMX and RDM control with optional W-DMX
-

Color




Beam Angle 24°

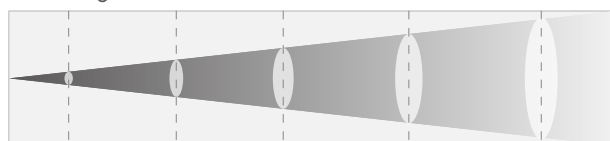

Distance (m)	1	3	5	7	10
Illuminance (Lux)	26010	2890	1040	530	260
Diameter(cm)	43	128	213	298	425

Beam Angle 65°

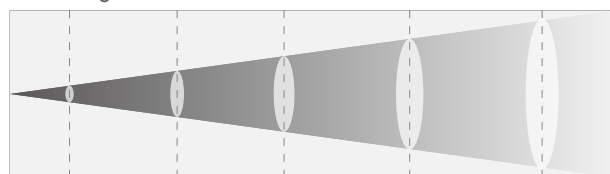

Distance (m)	1	3	5	7	10
Illuminance (Lux)	4410	490	176	90	45
Diameter(cm)	127	382	637	892	1274

PHOTOMETRICS

Light Source	150W RGBW LED
Luminous Flux	5700 lm (24°)
Illuminance	2900lux@ 3M (24°)
CRI	Ra≥ 90
CCT	2800K-6500K
Beam Angle	24° / 65°
Field Angle	41° / 99°

KEY FEATURES

Strobe	0-30 Hz
PWM Frequency	600 / 1200 / 2000 / 4000 / 6000 / 25000Hz
Dimming	4 dimming curves, 0~100% dimming

CONTROL


Protocol	DMX/RDM
DMX Channel	4CH / 6 CH / 10CH
Data Connection	3pin and 5pin XLR In/Out linking up to 32pcs
Display	1.3 inch LCD display with manual flipping

POWER


Mains	100 - 240 VAC, 50/60 Hz
Power Connections	PowerCon In/Out, linking up to 14pcs
Consumption	148W@230V, 152W@120V

PHYSICAL


Operating Temperature	-10°C~45°C
Cooling	Low noise fan for forced air
Housing	Die-cast aluminium, black finish
Dimension	450 x 316 x 208 mm
Weight	5.65kg
Accessory	65°interchangeable lens



top



Front



Side